


KASTO - SBA 400 AU-G - 2000

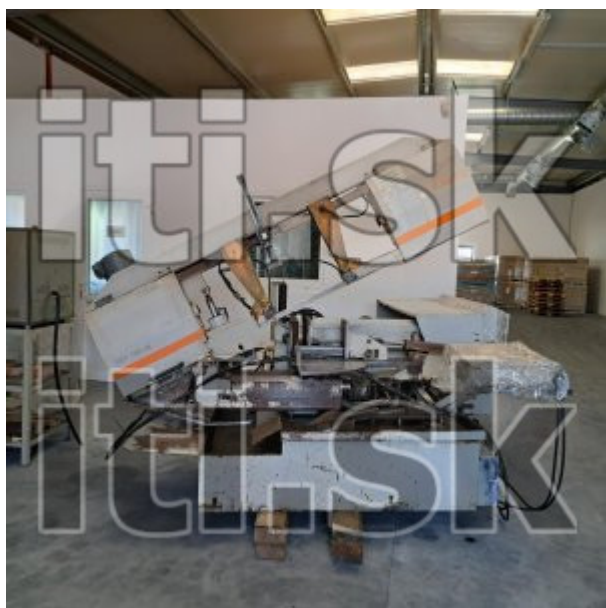

Manufacturer: **KASTO**

Type: **SBA 400 AU-G**

Year of manufacturing: **2000**

Parameters: **smallest cutting length 6 mm**

Description:

KASTO - SBA 400 AU-G - 2000

- length 2570 mm (102")
- width 2520 mm (100")
- max. height 2110 mm (83")
- min. height 1370 mm (54")
- total weight 1850 kg (4080 lbs)
- total power 5.0 kW (6.7 HP)
- saw motor 2.2 kW (2.9 HP)

cutting range

cutting angle

- 0°
- +45°
- +60°

round section ø

- 400 mm (15.7")
- 320 mm (12.6")
- 240 mm (9.4")

rectangular section w x h

- 400 x 320 mm (15.7 x 12.6")
- 320 x 320 mm (12.6 x 12.6")
- 220 x 220 mm (8.6 x 8.6")

- smallest possible diameter ø10 mm (0.4")

- minimum cutting length 6 mm (0.24")

- min. residual length, single cut 30 mm (1.2")

- min. residual length, automatic mode 240 mm (9.5")

- automatic material feeding - single feeding 590 mm

- automatic multiple feeding 9999 mm

- maximum material weight 400 kg/m (270 lb/ft)

- cutting speed infinitely variable 17-90 m/min

- cutting speed infinitely variable 17-90 m/min

- cutting feed infinitely variable

material clamping

- adjustable between 20 and 60 bar

- adjustable between 20 and 60 bar

- saw blade dimensions 5090 x 34 x 1.1 mm (200.4" x 1.34" x 0.04")

- saw blade guide carbide, replaceable

- saw blade tensioning mechanically, with clamping handle

- saw blade cleaning via easily replaceable wire brush, driven depending on the main drive
- cooling
- via 2 coolant nozzles
- coolant tank capacity approx. 60l (16 US gallons)
- pump capacity approx. 16 l/min (4 US gallons/min)